

Single Clips Copper (Bare) - WRC




NOTES:

Manufactured from drawn copper strip to BS1432 C101
9.52mm X 0.6mm HV 90 – 110

Saddle Reference WRC*	Approximate Diameters mm (Reference A) Followed By	Hole Size mm (Reference B)	Wood Screw Number	Suitable for the following Bare or CC MICC Cables
*20	5.1 - 5.4	4	6	2L1, 1H2.5
*22	5.7 - 6.0	4	6	2L1.5, 3L1, 1H4
*24	6.4 - 6.7	4	6	3L1.5, 4L1, 1H6
*26	6.6 - 6.9	4	6	2L2.5
*28	7.3 - 7.6	4	6	3L2.5, 4L1.5, 1H10
*30	7.7 - 8.0	5.25	6	2L4, 7L1, 2H1.5
*32	8.1 - 8.4	5.25	8	4L2.5, 7L1.5, 1H16, 3H1.5
*34	8.7 - 9.0	5.25	8	2H2.5
*37	9.4 - 9.9	5.25	8	7L2.5, 1H25, 2H4, 3H2.5, 4H1.5
*40	10.3 - 10.8	5.25	8	1H35, 3H4, 4H2.5
*43	10.9 - 11.3	5.5	10	2H6, 3H6, 4H4, 7H1.5
*47	12.4 - 12.8	5.5	10	1H50, 2H10, 4H6, 7H2.5
*51	13.1 - 13.4	5.5	10	2H16
*54	13.6 - 14.8	5.5	10	1H70, 3H10, 4H10, 12H1.5
*59	15.2 - 15.6	5.5	10	1H95, 3H16, 12H2.5
*63	16.4 - 16.8	5.5	10	1H120, 19H1.5
*67	16.9 - 17.3	7.1	14	2H25, 4H16
*71	18.1 - 18.6	7.1	14	1H150, 3H25
*75	19.2 - 19.6	7.1	14	-
*79	20.0 - 21.4	7.1	14	1H185, 4H25
*88	22.9 - 22.5	7.1	14	1H240
*101	25.8 - 26.2	7	14	1H300

Saddles Clips Copper (Bare) - WRS

P Clip Reference WRS*	Approximate Diameters mm (Reference A) Followed By	Hole Size mm (Reference B)	Fixing Centre mm (Reference C)	Wood Screw Number	Suitable for the following Bare or CC MICC Cables
*202	2 x 5.0 - 5.4	4.0	27.0	6	2L1, 1H2.5
*222	2 x 5.5 - 5.9	4.0	27.0	6	2L1.5, 1H4
*242	2 x 6.0 - 6.5	4.0	27.0	6	3L1
*272	2 x 6.8 - 7.2	4.0	27.0	6	2L2.5, 3L1.5, 4L1, 1H6
*302	2 x 7.6 - 8.0	4.0	27.0	6	2L4, 3L2.5, 4L1.5, 7L1, 1H10
*342	2 x 8.6 - 9.0	5.25	36.0	8	4L2.5, 7L1.5, 1H16, 2H1.5, 2H2.5, 3H1.5
*382	2 x 9.6 - 10.1	5.25	36.0	8	7L2.5, 1H25, 3H2.5, 4H1.5
*422	2 x 10.6 - 11.1	5.25	36.0	8	1H35, 2H4, 3H4, 4H2.5
*462	2 x 11.6 - 12.1	5.5	49.0	10	2H6, 3H6, 4H4, 7H1.5
*502	2 x 12.4 - 13.3	5.5	49.0	10	1H50, 2H10, 4H6, 7H2.5
*542	2 x 13.4 - 14.3	5.5	49.0	10	1H70, 3H10
*592	2 x 14.4 - 15.3	5.5	49.0	10	2H16, 4H10, 12H1.5
*632	2 x 15.4 - 17.2	5.5	49.0	10	1H95, 3H16, 12H2.5
*702	2 x 17.3 - 18.2	7.0	62.0	14	1H120, 2H25, 4H16, 19H1.5
*752	2 x 18.3 - 20.1	7.1	62.0	14	1H150, 3H25
*812	2 x 20.2 - 21.0	7.1	62.0	14	1H185, 4H25

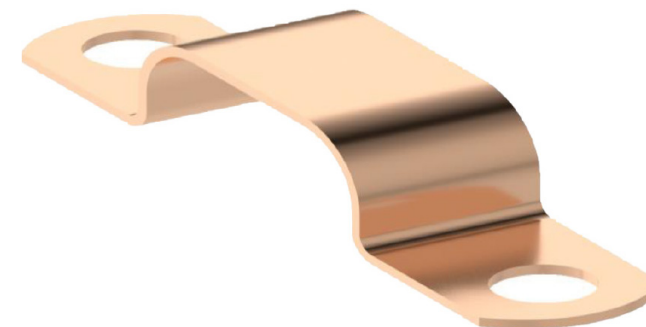

NOTES:

Manufactured from drawn copper strip to BS1432 C101
9.52mm X 0.6mm HV 90 - 110